



Repositorio Institucional de la Universidad Autónoma de Madrid

<https://repositorio.uam.es>

Esta es la **versión de autor** del artículo publicado en:

This is an **author produced version** of a paper published in:

Environmental Science and Pollution Research, 09 January (2018)

DOI: <https://doi.org/10.1007/s11356-017-0867-4>

Copyright: © Springer-Verlag GmbH Germany, part of Springer Nature 2018

El acceso a la versión del editor puede requerir la suscripción del recurso

Access to the published version may require subscription

1 **Removal of imidazolium and pyridinium based ionic liquids by Fenton oxidation**

2 **Esther Gomez-Herrero^{a*}, Montserrat Tobajas^a, Alicia Polo^a, Juan J. Rodriguez^a,**

3 **Angel F. Mohedano^a.**

4 ^aSección de Ingeniería Química, Facultad de Ciencias, Universidad Autónoma de

5 Madrid, Campus de Cantoblanco, 28049 Madrid, Spain.

6 Corresponding author: Tel.: +34 914973525


7 *E-mail address:* esther.gomezh@uam.es

8

Abstract

The oxidation of imidazolium (1-hexyl-3-methylimidazolium chloride, HmimCl) and pyridinium (1-butyl-4-methylpyridinium chloride, BmpyrCl) ionic liquids (ILs) by Fenton's reagent has been studied. Complete conversion was achieved for both ILs using the stoichiometric H_2O_2 dose at 70°C , reaching final TOC conversion values around 45 and 55% for HmimCl and BmpyrCl, respectively. The decrease in hydrogen peroxide dose to substoichiometric concentrations (20-80% stoichiometric dose) caused a decrease in TOC conversions and COD removal and the appearance of hydroxylated oxidation by-products. Working at these substoichiometric H_2O_2 doses allowed the depiction of a possible degradation pathway for the oxidation of both imidazolium and pyridinium ILs. The first step of the oxidation process consisted in the hydroxylation of the ionic liquid by the attack of the $\cdot\text{OH}$ radicals, followed by the ring-opening and the formation of short-chain organic acids, which could be partially oxidized up to CO_2 and H_2O . At H_2O_2 doses near stoichiometric values (80%), the resulting effluents showed non-ecotoxic values and more biodegradable character (BOD_5/COD ratio around 0.38 and 0.58 for HmimCl and BmpyrCl, respectively) due to the formation of short-chain organic acids.

Graphical abstract

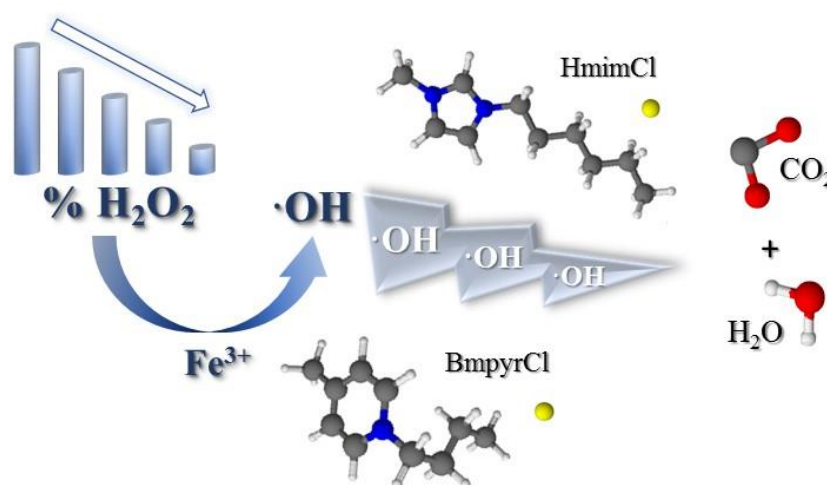

Keywords

Ionic liquids, Imidazolium, Pyridinium, Fenton oxidation, Degradation pathway, Ecotoxicity.

1. Introduction

Ionic liquids (ILs) are a novel class of room temperature salts, formed by an organic cation and an organic or inorganic anion, being able to combine both components giving rise to “designer solvents” (Plechkova and Seddon 2007). In the last decades, ionic liquids (ILs) have acquired special interest due to their low vapor pressure, non-flammability, thermal stability and high solubility in water (Yue et al. 2011). The increase of the number of publications and patents related with ILs and changes in their solubility, polarity and hydrophobicity is in agreement with the importance of these compounds in industrial treatments and applications: catalysis, separation processes, electrochemistry or chemical synthesis (Kubisa 2004; Vekariya 2017).

ILs are considered as “environmental friendly” compounds which have been proposed as optimal alternative for volatile organic solvents (Ventura et al. 2013). However, their release into aquatic environment could lead to water pollution due to the high solubility of these compounds. The moderate toxicity and poor biodegradability (Wells and Coombe 2006; Docherty et al. 2007) leaves the environmental image of ILs away from “green solvents”. In this sense, it is necessary to develop powerful oxidation processes for the removal of these compounds and to avoid their possible discharge into the aquatic media.

Advanced oxidation processes (AOPs), based on the hydroxyl radicals action over the target compound, are considered a promising alternative for the degradation of a large number of pollutants. However, less is known about the application of AOPs for the

oxidation of ionic liquids in liquid phase. Fenton oxidation is considered one of the most appropriate treatment in terms of cost-effectiveness, based on the catalytic decomposition of H_2O_2 by means of iron salts to produce hydroxyl radicals. It has been applied for the oxidation of a wide range of pollutants and real wastewaters (Bautista et al 2008; Pliego et al 2012). However, only few works dealt with the removal of ILs by Fenton oxidation (Siedlecka et al. 2008; Czerwicka et al. 2009; Siedlecka et al. 2012; Munoz et al. 2015a; Munoz et al. 2015b). Siedlecka et al. (2008) studied the effect of pH and catalyst concentration, mainly focused in the removal of imidazolium ILs at ambient conditions, while Munoz et al. (2015a; 2015b) established the optimal conditions to achieve high mineralization degrees of imidazolium and pyridinium ILs. Photocatalytic and electrochemical processes have been also studied for the degradation of ILs (Stepnowski and Zaleska 2005). Siedlecka et al. (2013) evaluated the mechanism of imidazolium degradation with different types of electrodes. Several works revealed that Anodic Oxidation (AO) was an efficient process for the degradation of ILs, concluding that the mineralization rate decrease as the number of carbons in the side chain increase (Siedlecka et al. 2012). AO, electro-Fenton and photoelectron-Fenton processes were compared by Garcia-Segura et al. (2016) for the removal of pyridinium and imidazolium ILs. Among the AOP's studies, UVA irradiation in photoelectro-Fenton was the most powerful treatment with total mineralization around 95% for both ILs.

The aim of this work is to study the feasibility of Fenton process for the removal in aqueous phase of two ionic liquids commonly used: 1-hexyl-3-methylimidazolium chloride (HmimCl) and 1-butyl-4-methylpyridinium chloride (BmpyrCl). The oxidation kinetic will be analyzed and the possible pathways will be established. Finally, the ecotoxicity and biodegradability of the effluents obtained upon Fenton oxidation will be evaluated for both target compounds.

2. Materials and Methods

2.1 Chemicals

1-hexyl-3-methylimidazolium chloride, HmimCl (98% of purity) and 1-butyl-4-methylpyridinium chloride, BmpyrCl (98% of purity) were purchased from Sigma-Aldrich®. Hydrogen peroxide (33 wt. %), hydrochloric acid (37 wt. %), iron (III) nitrate nonahydrate (98 wt. %) and sodium hydroxide (98 wt. %) were provided by Panreac.

2.2 Fenton oxidation

Fenton oxidation experiments were carried out in a 1 L glass reactor with controlled temperature (70°C) at 200 rpm and pH 3. Each IL, with a starting concentration of 1 g L⁻¹, was placed in the reactor with different doses of H₂O₂, ranged from the stoichiometric concentration (calculated as the theoretical concentration necessary for the complete mineralization of ILs, 4.9 g L⁻¹ for HmimCl and 5.1 g L⁻¹ for BmpyrCl) to a 20% of that value, maintaining a Fe³⁺/H₂O₂ ratio of 1/10 (M/M). Samples were collected during the reaction course until the complete depletion of H₂O₂, neutralized with NaOH (6 N) and filtered (Albert FV-C) for their subsequent analysis.

Total organic carbon (TOC) and total nitrogen (TN) were measured using a TOC-Vcsh apparatus from Shimadzu. COD was analyzed following the APHA procedure 5220A (APHA, 1992). BOD₅ was determined in a Velp Scientifica equipment, following the standard procedure 5210 (APHA, 1992), using 500 mL of sample volume. Hydrogen peroxide concentration was determined by colorimetric titration through the method of sulphate titanium (Eisenberg, 1943), using a Shimadzu UV-1603 spectrophotometer.

The ecotoxicity of the imidazolium and pyridinium based ILs solutions and effluents upon Fenton oxidation was determined by Microtox® toxicity test (ISO 11348-3 1998). The results were expressed as toxicity units (TU).

HmimCl and BmpyrCl were quantified by HPLC (Varian Prostar 325) with a UV-vis detector at 218 nm. A Synergy 4 mm Polar-RP 80 A column (15 cm length, 4.6 mm diameter, Phenomenex) was used as the stationary phase and phosphate buffer and acetonitrile at different ratios (5% and 40% for Hmim⁺ and Bmpyr⁺, respectively) were used as mobile phase with a constant flow of 0.75 mL min⁻¹. Ion chromatography with chemical suppression (Metrohm 790 IC) and a conductivity detector was employed to quantify short-chain organic acids, nitrate and nitrite. Metrosep A suppp 2-250 column (25 cm length, 4 mm i.d.) was used as the stationary phase and an aqueous solution of 1 mM NaHCO₃ and 3.2 mM Na₂CO₃ as mobile phase, with a constant flow of 0.7 mL min⁻¹. Other reaction by-products were detected by HPLC/MS (Agilent, Quadrupole LC/MS). An ACE Excel 3 C-18-amide column (15 cm length, 4.6 mm diameter) was used as the stationary phase and an aqueous solution of formic acid (0.1%) and ACN gradient with a constant flow of 0.5 mL min⁻¹ as a mobile phase. Mass spectrometry was performed by electrospray ionization with a drying gas flow of 9 L min⁻¹.

3. Results and discussion

Fig. 1 shows the time-course of normalized concentration of Hmim⁺ and Bmpyr⁺ cations, TOC/TOC₀ and conversion of H₂O₂ upon Fenton oxidation. Both cations were completely removed in very short reaction times, being the removal rate higher in case of Hmim⁺. The elimination of the target compounds was higher at early stages of Fenton oxidation, showing a less pronounced variation after the first hour reaching final TOC conversions of 54% and 44% for HmimCl and BmpyrCl, respectively. Siedlecka et al. (2008) reported complete degradation of imidazolium ILs at 25°C, although the time required to reach total conversion of the pollutant was increased to 90 min due to the lower temperature used.

The apparent kinetic order and rate constants of IL and TOC removal and H_2O_2 consumption for both ILs are shown in **Table 1**. IL removal and H_2O_2 consumption could be described by a first-order while TOC reduction was fit as a second-order kinetics. As can be seen, the kinetic constant values for Fenton oxidation of HmimCl were higher than for BmpyrCl, with a more pronounced increase in the case of IL depletion, corroborating the results showed in **Fig. 1**. The H_2O_2 consumption rate is quite similar for both ILs. Siedlecka et al. (2008) also described as a pseudo-first order kinetics the removal of 1-butyl-3-methylimidazolium chloride (BmimCl).

Fig 2 shows Hmim⁺ and Bmpyr⁺, COD and TOC conversion after 4 h reaction time at substoichiometric H_2O_2 doses. Only a complete conversion of both ILs was achieved in reactions with H_2O_2 doses higher than 60% of stoichiometric value. Hmim⁺ showed greater resistance to be removed at low H_2O_2 doses, reaching values of 50% removal for 20% H_2O_2 dose. The relationship between the decrease of COD and TOC conversion with H_2O_2 dose is nearly lineal. In case of pyridinium IL, TOC conversion and COD degradation obtained at 20% of H_2O_2 dose were negligible, indicating that the by-products generated during the oxidation showed a strong refractory character to mineralization. Final COD and TOC values, far from the total conversion, implied a refractory character of the cation ring to the complete mineralization (Matzke et al. 2010). Although several authors dealt with Fenton oxidation for the removal of ILs, only Munoz et al. (2015a) provided information about the evolution of TOC at stoichiometric dose, reaching final conversion values next to those obtained in **Fig. 1**.

The identification of the oxidation by-products upon Fenton oxidation were carried out by HPLC/MS, based on the m/z ratio. Among the large number of compounds detected, the results showed hydroxylated compounds with molar weight higher than the starting compounds at low H_2O_2 doses for both ILs. **Fig. 3** depicts a possible reaction pathway for

HmimCl and BmpyrCl Fenton oxidation. Intermediates with m/z of 182 for imidazolium IL and m/z of 166 and 242 for pyridinium IL were identified. As the H_2O_2 dose increase, compounds with different breaks in the alkyl-chain were also observed. In the last oxidation stages, the breakdown of the imidazolium and pyridinium ring took place, given rise to the formation of short chain organic acids, which could be oxidized to CO_2 and H_2O , final oxidation products along with oxidized nitrogen species (Garcia-Segura et al. 2016) such as NO and NO_2 . Those short-chain organic acids, final oxidation products, were only detected at high reactant doses. An additional assay using a 10% of the stoichiometric H_2O_2 dose, performed with the aim to detect the oxidation by-products formed at early oxidation stages, allowed the identification of further compounds (m/z = 197 and 154 for HmimCl and m/z = 165 for BmpyrCl). Munoz et al. (2015a) only detected the m/z = 166 and m/z = 100 compounds for BmpyrCl oxidation. Siedlecka et al. (2013) observed the intermediates with m/z = 82, m/z = 185 and m/z = 154 for HmimCl oxidation by an electrocatalytic process, while Pieczynska et al. (2015) detected further compounds with m/z = 155 and m/z = 182 for HmimCl and m/z = 166 and m/z = 165 for BmpyrCl, using the same oxidation process. Garcia-Segura et al. (2016) found the m/z = 97 compound using photoelectron-Fenton and anoxic oxidation processes.

Fig. 4 depicts the short-chain organic acids (acetic, formic, oxalic, malonic and fumaric acids) found in the effluents upon Fenton oxidation of both ILs using H_2O_2 from 20% to stoichiometric doses. For HmimCl oxidation, formic acid concentration showed a maximum at 20% of reactant dose decreasing at increasing H_2O_2 dose, while acetic, oxalic, malonic and fumaric acids exhibited constant concentration value for doses higher than 40% of the stoichiometric, which is in agreement with the refractory character of those acids (Barrault et al. 2005). On the other hand, for BmpyrCl, the concentration of acetic acid increased at increasing H_2O_2 percentage, reaching the highest value (230 mg

L⁻¹) at stoichiometric H₂O₂ dose. Oxalic and malonic acids also increased at H₂O₂ doses higher than 60% of the stoichiometric. In this case, formic acid described a plateau instead of the decreasing trend found for HmimCl oxidation.

The carbon and nitrogen balance closure for HmimCl and BmpyrCl was shown in **Fig. 5**. Identified TOC and TN corresponded to short-chain organic acids and inorganic nitrogen species, respectively. Comparing these results with measured TOC and TN for both ILs showed a decrease in the measured TOC up to 50% for the stoichiometric dose in HmimCl effluents, while a less value was achieved for pyridinium effluents (40%). Measured TN has been reduced over 5-10% at stoichiometric H₂O₂ dose, compared with TN of both starting compounds. The balance closure for carbon and nitrogen increased with the H₂O₂ dose, with the exception of the effluent from HmimCl oxidation using 20% of H₂O₂ dose. In this assay, the low removal of Hmim⁺ cation caused an increase in the identified TOC fraction even though the TOC corresponding to short-chain organic acids is minimal compared to effluents with higher doses of reactant. The TOC identified as short chain organic acids mostly corresponds to acetic acid for both ILs, as can be seen in **Fig. 4**.

The TN quantified as nitrate and nitrite corresponded with the 20-30% of the measured TN, being the nitrate concentration of 20 mg L⁻¹ at stoichiometric H₂O₂ dose, while the nitrite concentration was 8 mg L⁻¹ for that effluent. On the other hand, for effluents of Fenton oxidation with lower H₂O₂ doses, the concentration of nitrite and nitrate became more similar (4 mg L⁻¹ for NO₂⁻ and 4.5 mg L⁻¹ for NO₃⁻), indicating an increase in the oxidation rate was related with the high conversion of nitrite in nitrate. For all the H₂O₂ doses, the nitrogen mass balance was incomplete, due to the possible formation of nitrogen-containing by-products as chloramines (Vidales et al. 2016) and NO_x species in gas phase (Garcia-Segura et al. 2017).

Knowing the structure of the compounds present in the effluents, the ratio C:N could be established, comparing between the starting compound and the effluents obtained after oxidation process. Likewise, the C:N ratios for the starting ILs were higher than for the effluents at stoichiometric H₂O₂ dose, which indicated the greater degradation of alkyl-chains (more accused in Hmim⁺ oxidation due to the length of the side chain) while the imidazolium and pyridinium rings was more persistent to degradation (Deng et al. 2015).

Ecotoxicity values of the different effluents from Fenton oxidation using Microtox[®] assay are shown in **Table 2**. As the reactant dose increased, the TU (toxicity units) decreased, reaching non ecotoxic values at effluents of stoichiometric H₂O₂ dose for both ILs. However, the effluents treated with lower reactant doses presented higher ecotoxicity character than the starting IL, indicating that the hydroxylated compounds were more harmful to aquatic environments than target compounds. This effect was more pronounced in the case of pyridinium ionic liquid, where effluents of Fenton oxidation with H₂O₂ doses higher than 80% were the only ones that could be considered less toxic than BmpyrCl. The ecotoxicity values obtained for the starting ILs, 1.5 mM and 0.9 mM for HmimCl and BmpyrCl, respectively, were in a good agreement with those found in the literature (Docherty and Kulpa, Jr. 2005; Munoz et al. 2015b). **Table 2** also shows the biodegradability index (BOD₅/COD ratio) and TOC/COD ratio for the effluents from Fenton oxidation of ILs. The increase of the concentration of H₂O₂ gave rise to more biodegradable effluents than the starting compound for both ILs. Those results were related with an increase in BOD₅ values and the scarce decay in COD values, increasing the biodegradability index due to the formation of organic by-products at low H₂O₂ doses. However, from H₂O₂ doses of 60% for Hmim⁺ and 80% for Bmpyr⁺ cations, BOD₅/COD reached a constant value which implied a reduction of BOD₅ proportional to COD one, because of the elimination of by-products aforementioned and the subsequent formation

of short-chain organic acids with lower biological and chemical oxygen demand. TOC/COD ratio for effluents from HmimCl oxidation increased with the H₂O₂ dose, whereas the ratio was maintained constant for all the H₂O₂ concentrations tested for BmpyrCl effluents. The decay in COD values was more pronounced than TOC for imidazolium IL.

An additional Fenton oxidation experiment with both ionic liquids (HmimCl and BmpyrCl) has been carried out, in order to study the behavior of the mixture in a synthetic matrix maintaining the operating conditions aforementioned. The ionic liquid concentration was fixed to 1 g L⁻¹ for each compound. The results of the experiment are shown in **Table 3**. Complete removal of Hmim⁺ and Bmpyr⁺ was achieved, reaching 54% TOC conversion. The consumption of H₂O₂ occurred mainly during the first 90 min and then, a very slow decay was observed. COD conversion increased up to around 70%. In spite of the complete depletion of the starting compounds, TOC and COD conversion did not reach higher values due mainly, as is well known, to the formation of short-chain organic acids which are refractory to Fenton oxidation. Thus, more than 80% of the measured TOC was identified as short-chain organic acids, mostly formic and acetic acids, being other oxidation by-products the unidentified TOC fraction. Around 40% of the measured TN was measured as nitrate. The nitrogen mass balance was incomplete mainly due to the formation of different nitrogen species in the gas phase, as has been previously reported (Garcia-Segura et al. 2017), such as NO_x species, and to a lesser extent by nitrogen species by-products in the liquid phase, which have been included in the proposed pathway (**Fig. 3**). Finally, the chlorine balance was almost completely closed. Probably, the unidentified fraction could corresponds to the formation of chloramines (Vidales et al. 2016) or other chlorine species. Comparing these results with those described for Fenton oxidation of ionic liquids separately, it can be concluded that

the presence of both compounds lead to similar results in terms of IL removal, mineralization of the starting compounds and COD conversion and no synergistic effect, interference or competition between HmimCl and BmpyrCl was observed.

4. Conclusions

Fenton oxidation at controlled temperature (70°C) was proved to be an efficient process for the removal of imidazolium (HmimCl) and pyridinium (BmpyrCl) based ionic liquids. Using the stoichiometric H₂O₂ dose, the complete conversion of both ILs was achieved at the early stages of the oxidation, observing remaining IL concentrations at substoichiometric H₂O₂ doses below 40%. TOC and COD conversion increased as the H₂O₂ dose increased, reaching values around 40-55% for both ILs. The possible degradation pathway for Hmim⁺ and Bmpyr⁺ includes the hydroxylation of the cations by the attack of the ·OH radicals, followed by the ring-opening and the formation of short-chain organic acids, in a considerable concentration in assays with H₂O₂ near stoichiometric dose, which could be partially oxidized up to CO₂ and H₂O. The resulting effluents showed lower ecotoxicity values than the target compounds, with a highly improved biodegradability character.

Acknowledgements

The authors wish to thank the Spanish MINECO and Comunidad de Madrid for the financial support through the projects CTM2016-76564-R and S2013/MAE-2716, respectively.

References

272 Barrault J, Tatiboue JM, Carriazo J, et al (2005) Catalytic wet peroxide oxidation of
 273 phenol by pillared clays containing Al – Ce – Fe. 39:3891–3899. doi:
 274 10.1016/j.watres.2005.06.034

275 Bautista, P.; Mohedano, A. F.; Casas, J. A.; Zazo, J. A.; Rodriguez JJ (2008) An overview
 276 of the application of Fenton oxidation to industrial wastewaters treatment. J Chem
 277 Technol Biotechnol 83:1323–1338. doi: 10.1002/jctb.1988

278 Czerwicka M, Stolte S, Müller A, et al (2009) Identification of ionic liquid breakdown
 279 products in an advanced oxidation system. J Hazard Mater 171:478–483. doi:
 280 10.1016/j.jhazmat.2009.06.027

281 Deng Y, Beadham I, Ghavre M, et al (2015) When can ionic liquids be considered readily
 282 biodegradable ? Biodegradation pathways of. 1479–1491. doi: 10.1039/c4gc01904k

283 Docherty KM, Dixon JK, Kulpa CF (2007) Biodegradability of imidazolium and
 284 pyridinium ionic liquids by an activated sludge microbial community.
 285 Biodegradation 18:481–493. doi: 10.1007/s10532-006-9081-7

286 Docherty KM, Kulpa, Jr. CF (2005) Toxicity and antimicrobial activity of imidazolium
 287 and pyridinium ionic liquids. Green Chem 7:185. doi: 10.1039/b419172b

288 G. Pliego, J.A. Zazo, S. Blasco, J.A. Casas JJR (2012) Treatment of highly polluted
 289 hazardous industrial wastewater by combined coagulation-adsorption and high-
 290 temperature Fenton oxidation. Ind Eng Chem Res 51:2888–2896.

291 Garcia-Segura S, Lima ÁS, Cavalcanti EB, Brillas E (2016) Anodic oxidation, electro-
 292 Fenton and photoelectro-Fenton degradations of pyridinium- and imidazolium-
 293 based ionic liquids in waters using a BDD/air-diffusion cell. Electrochim Acta
 294 198:268–279. doi: 10.1016/j.electacta.2016.03.057

295 Garcia-segura S, Mostafa E, Baltruschat H (2017) Applied Catalysis B : Environmental

296 Could NO_x be released during mineralization of pollutants containing nitrogen by
 297 hydroxyl radical ? Ascertaining the release of N-volatile species. "Applied Catal B,
 298 Environ 207:376–384. doi: 10.1016/j.apcatb.2017.02.046
 299 Kubisa P (2004) Application of ionic liquids as solvents for polymerization processes.
 300 Prog Polym Sci 29:3–12. doi: 10.1016/j.progpolymsci.2003.10.002
 301 Matzke M, Arning J, Ranke J, et al (2010) Design of inherently safer ionic liquids:
 302 toxicology and biodegradation. Handb Green Chem 235–298.
 303 Munoz M, Domínguez CM, De Pedro ZM, et al (2015a) Ionic liquids breakdown by
 304 Fenton oxidation. Catal Today 240:16–21. doi: 10.1016/j.cattod.2014.03.028
 305 Munoz M, Domínguez CM, De Pedro ZM, et al (2015b) Role of the chemical structure
 306 of ionic liquids in their ecotoxicity and reactivity towards Fenton oxidation. Sep
 307 Purif Technol 150:252–256. doi: 10.1016/j.seppur.2015.07.014
 308 Pieczyska A, Ofiarska A, Borzyszkowska AF, et al (2015) A comparative study of
 309 electrochemical degradation of imidazolium and pyridinium ionic liquids: A
 310 reaction pathway and ecotoxicity evaluation. Sep Purif Technol 156:522–534. doi:
 311 10.1016/j.seppur.2015.10.045
 312 Plechkova N V, Seddon KR (2007) Ionic liquids: “Designer” Solvents for Green
 313 Chemistry. Methods Regents Green Chem An Introd 103–130. doi:
 314 10.1002/9780470124086.ch5
 315 Siedlecka EM, Fabiańska A, Stolte S, et al (2013) Electrocatalytic oxidation of 1-butyl-
 316 3-methylimidazolium chloride: Effect of the electrode material. Int J Electrochem
 317 Sci 8:5560–5574.
 318 Siedlecka EM, Mroziński W, Kaczyński Z, Stepnowski P (2008) Degradation of 1-butyl-3-
 319 methylimidazolium chloride ionic liquid in a Fenton-like system. J Hazard Mater

154:893–900. doi: 10.1016/j.jhazmat.2007.10.104

Siedlecka EM, Stolte S, Gołębiowski M, et al (2012) Advanced oxidation process for the removal of ionic liquids from water: The influence of functionalized side chains on the electrochemical degradability of imidazolium cations. *Sep Purif Technol* 101:26–33. doi: 10.1016/j.seppur.2012.09.012

Stepnowski P, Zaleska A (2005) Comparison of different advanced oxidation processes for the degradation of room temperature ionic liquids. *J Photochem Photobiol A Chem* 170:45–50. doi: 10.1016/j.jphotochem.2004.07.019

Vekariya RL (2017) A review of ionic liquids: Applications towards catalytic organic transformations. *J Mol Liq* 227:44–60. doi: 10.1016/j.molliq.2016.11.123

Ventura SPM, Gonçalves AMM, Sintra T, et al (2013) Designing ionic liquids: The chemical structure role in the toxicity. *Ecotoxicology* 22:1–12. doi: 10.1007/s10646-012-0997-x

Vidales MJM De, Millán M, Sáez C, et al (2016) Electrochemistry Communications What happens to inorganic nitrogen species during conductive diamond electrochemical oxidation of real wastewater ? *Electrochem commun* 67:65–68. doi: 10.1016/j.elecom.2016.03.014

Wells AS, Coombe VT (2006) On the freshwater ecotoxicity and biodegradation properties of some common ionic liquids. *Org Process Res Dev* 10:794–798. doi: 10.1021/op060048i

Yue C, Fang D, Liu L, Yi TF (2011) Synthesis and application of task-specific ionic liquids used as catalysts and/or solvents in organic unit reactions. *J Mol Liq* 163:99–121. doi: 10.1016/j.molliq.2011.09.001

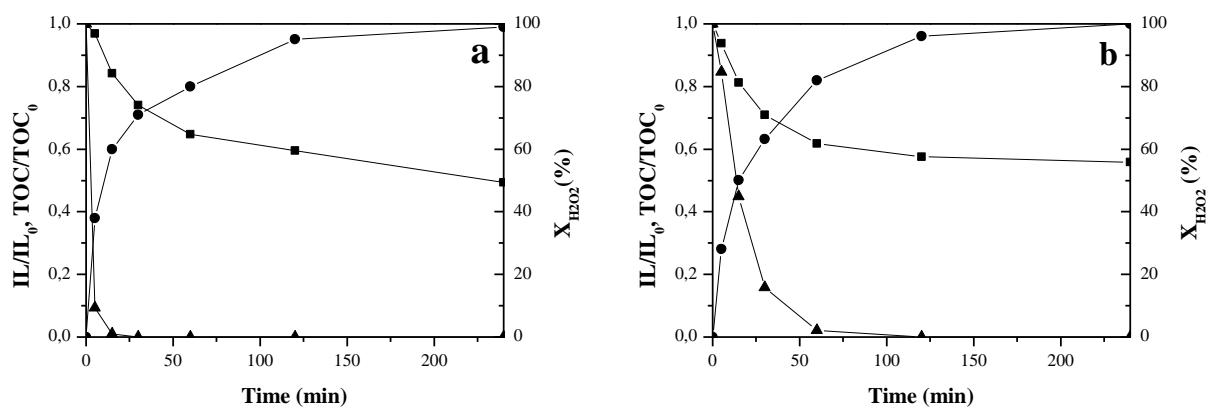


Fig. 1 Time-course of IL/IL₀ (▲), TOC/TOC₀ (■), and H₂O₂ conversion (●) upon Fenton oxidation (70°C) at stoichiometric dose of H₂O₂ for HmimCl (a) and BmpyrCl (b).

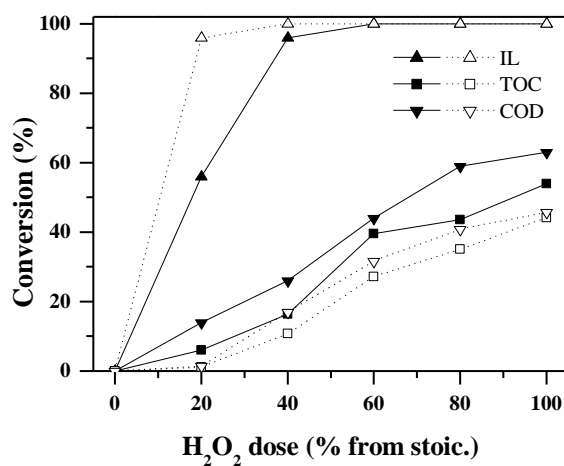


Fig. 2 Conversion of IL, COD and TOC (%) upon Fenton oxidation (70°C) at different substoichiometric H₂O₂ doses for HmimCl (filled symbols) and BmpyrCl (empty symbols).

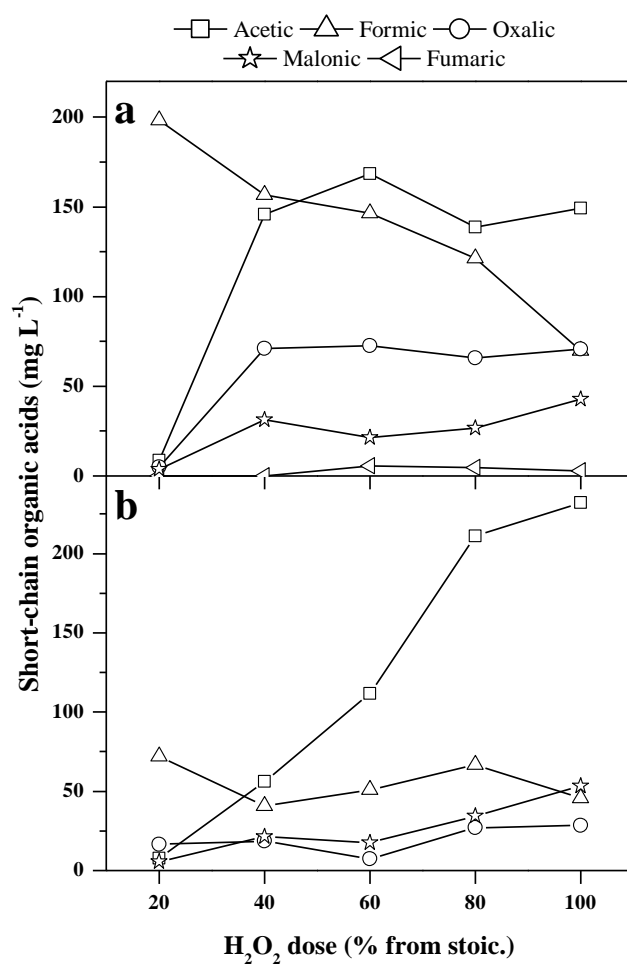


Fig. 4 – Short-chain organic acids in effluents from Fenton oxidation at different substoichiometric doses of H₂O₂ of HmimCl (a) and BmpyrCl (b)

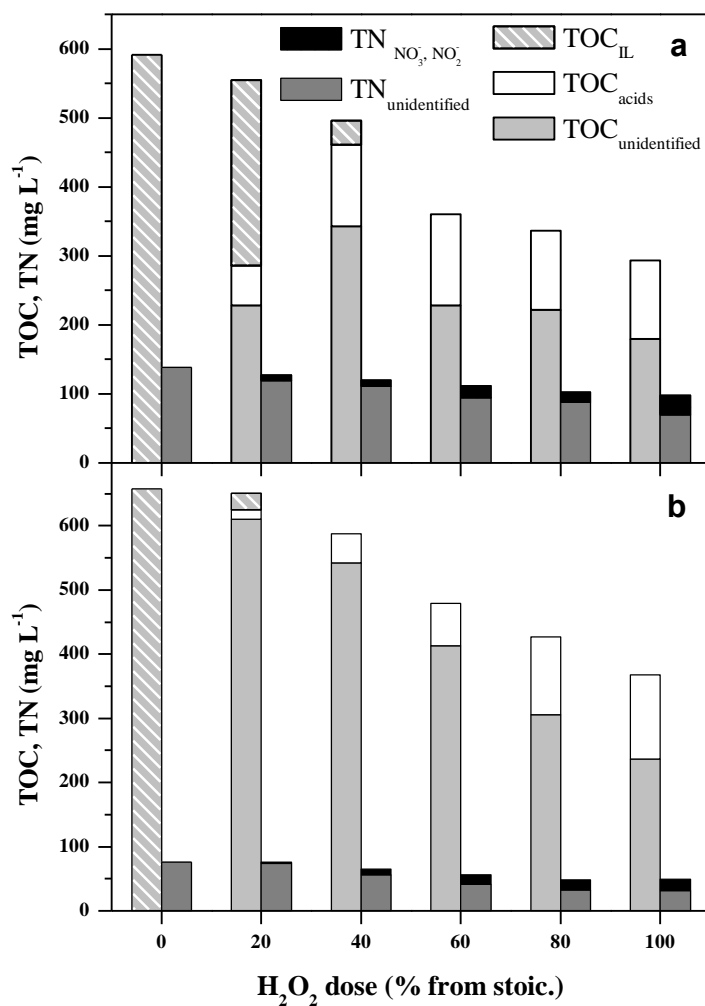


Fig. 5 – Measured and unidentified TN and TOC balance closure from Fenton oxidation at different substoichiometric H_2O_2 doses for HmimCl (a) and BmpyrCl (b).

Table 1 - Kinetic constants for IL removal, H₂O₂ consumption and TOC reduction rates upon Fenton oxidation at stoichiometric dose of H₂O₂.

| | HmimCl | | | BmpyrCl | | |
|-------------------------------|--------|--|----------------|---------|--|----------------|
| | Order | k (min ⁻¹) | R ² | Order | k (min ⁻¹) | R ² |
| IL | 1 | 0.2933 | 0.963 | 1 | 0.0651 | 0.998 |
| H ₂ O ₂ | 1 | 0.0271 | 0.984 | 1 | 0.0256 | 0.992 |
| TOC | Order | k (M ⁻¹ min ⁻¹) | R ² | Order | k (M ⁻¹ min ⁻¹) | R ² |
| | 2 | 8.4·10 ⁻⁵ | 0.969 | 2 | 6.0·10 ⁻⁵ | 0.966 |

Table 2 – Ecotoxicity (TU), BOD₅/COD and TOC/COD ratios for effluents from Fenton oxidation at different substoichiometric H₂O₂ doses.

| H ₂ O ₂ (%) | HmimCl | | | BmpyrCl | | |
|-----------------------------------|--------|-----------------------|---------|---------|-----------------------|---------|
| | TU | BOD ₅ /COD | TOC/COD | TU | BOD ₅ /COD | TOC/COD |
| 0 | 3.53 | 0.03 | 0.55 | 2.22 | 6.7 | 40.4 |
| 20 | 3.78 | 0.11 | 60.7 | 54.9 | 7.1 | 40.7 |
| 40 | 3.22 | 0.21 | 62.5 | 7.34 | 23.60 | 43.5 |
| 60 | 1.17 | 0.36 | 54.8 | 3.86 | 36.28 | 43.1 |
| 80 | 0.75 | 0.38 | 77.1 | 0.87 | 58.42 | 44.4 |
| 100 | 0.56 | 0.40 | 73.2 | 0.11 | 59.36 | 41.3 |

Table 3 Conversion of IL, TOC and COD (%) upon Fenton oxidation of HmimCl and BmpyrCl at stoichiometric H₂O₂ dose. Measured (M) and Identified (Id) TOC, TN and chloride concentration from resulting effluent from Fenton oxidation

| | Conversion (%) | | | TOC (mg L ⁻¹) | | TN (mg L ⁻¹) | | Cl ⁻ (mg L ⁻¹) | |
|---------|----------------|------|------|---------------------------|-------------------|--------------------------|------------------|---------------------------------------|----------------------------------|
| | IL | TOC | COD | M _{TOC} | Id _{TOC} | TN _m | TN _{id} | [Cl ⁻] _m | [Cl ⁻] _{id} |
| HmimCl | > 99 | | | | | | | | |
| BmpyrCl | > 99 | 54.1 | 70.0 | 625 | 509 | 178 | 71 | 364 | 354 |